

To request any additional information please contact us at:

Email:

sales@axcelphotonics.com



Features

- Up to 200mW CW output power.
- High Quality, Reliability, & Performance

Applications

- Fiber Lasers
- Telecommunication

Product Specifications

1064nm Single-Mode 14-Pin Butterfly Module Laser Diodes

Description:

High brightness, high quality, and high reliability are the foundation of our single mode product line. Axcel's 1064nm single mode laser modules are available with up to 210mW of continuous output power from a 14-pin butterfly packaged fiber. All chips are mounted on a 2.1mm COS within the package and come standard with an internal thermistor, TEC, and photodiode. Axcel's trademark laser chip design offers un-measurable degradation and long lifetimes that make our chips among the most reliable in the industry today. Our 1064nm single mode line serves a broad range of applications including fiber lasers and telecommunication.

Please view our website for mechanical drawings of all of our sub-mount, mount, and module packages.



Contact us today and learn how Axcel Photonics can accelerate your research and production!

Performance Data for Single-Mode 1064nm Butterfly module devices

Parameter	Unit	210mW			170mW w/FBG			130mW Series w/ Narrow FBG		
		Min	Typ	Max	Min	Typ	Max	Min	Typ	Max
Wavelength	nm	1059	1064	1069	1063.5	1064.0	1064.5	1063.5	1064.0	1064.5
Spectrum FWHM	nm	-	0.50	2.0	-	0.30	0.50	-	0.25	0.3
Rated Output Power (P _o)	mW	-	210	-	-	170	-	-	130	-
Kink-Free Power	mW	230	-	-	200	-	-	140	-	-
Operating Current (I _o)	mA	-	400	500	-	400	500	-	400	500
Operating Voltage (V _o)	V	-	2.1	2.5	-	2.1	2.5	-	2.1	2.5
Lifetime	hour	100,000	-	-	100,000	-	-	100,000	-	-
TEC Current	A	-	-	2.0	-	-	2.0	-	-	2.0
TEC Voltage	V	-	-	3.2	-	-	3.2	-	-	3.2
Threshold (I _{th})	mA	-	50	100	-	50	100	-	50	100
Slope Efficiency (dP/dI)	W/A	0.50	0.60	-	0.40	0.50	-	0.35	0.45	-
Storage Temperature	°C	-40	-	80	-40	-	80	-40	-	80
Operating Temperature (T _{op})	°C	0	25	70	0	25	70	0	25	70
Lead Soldering Temperature (5 sec)	°C	-	-	250	-	-	250	-	-	250

Note: 1) Specifications are subject to change without notice.

1064nm Single Mode Butterfly Module Performance Data Graphs

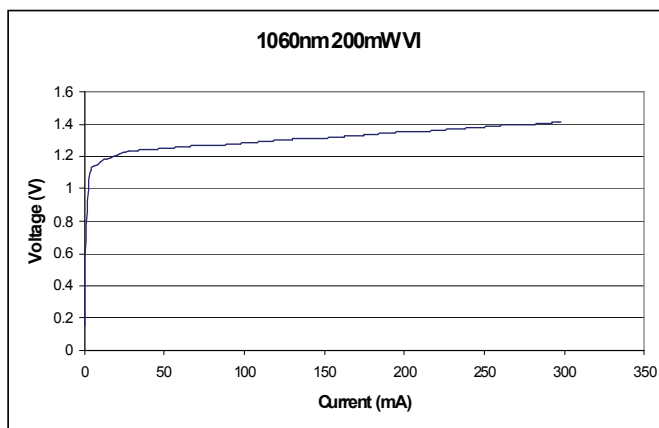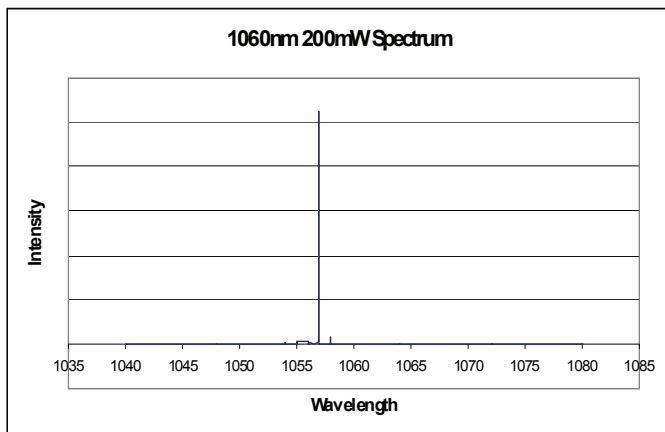

Determining Your Product number:

MM—WWW—PPPP—XYZ—(custom add-ons)

Standard Product Configurations

Package:

BF 14-pin butterfly (1.9mm COS)

Wavelength:

A64 1064nm

Power Options:

0130 130mW
0170 170mW
0210 210mW

X Option (aperture size)

P PM fiber for module

Y Option (wavelength tolerance)

P PM fiber FBG ±0.5nm
N Narrowband PM FBG ±0.5nm
5 ±5 nm

Z Option (additional options)

0 none

130mW Series

BF-A64-0130-PN0

170mW Series

BF-A64-0170-PP0

210mW Series

BF-A64-0210-P50

Please note: These are our standard product configurations. Other options may be available, please inquire about any

Safety

Caution: Laser light emitted from any diode laser is invisible and may be harmful to the human eye. Avoid looking directly into the diode laser aperture when the device is in operation.

Note: The use of optical instruments with this product will increase eye hazard.

ESD Caution

Always handle diode lasers with extreme care to prevent electrostatic discharge, the primary cause of unexpected diode failure. You can prevent ESD by always wearing wrist straps,

Operating Considerations

Operating the diode laser outside of its maximum ratings may cause device failure or a safety hazard. Power supplies used with the component must be employed such that the maximum peak optical power cannot be exceeded. CW diode lasers may be damaged by excessive drive current or switching transients. When using power supplies, the diode laser should be connected with the main power on and the output voltage at zero. The current should be increased slowly while monitoring the diode laser output power and the drive current. Device degradation accelerates with increased temperature, and therefore careful attention to minimize the case temperature is advised. A proper heat-sink for the diode laser on a thermal radiator will greatly enhance laser life.

Power Output Danger Label

WARNING! Invisible laser radiation is emitted from devices as shown

21 CFR 1040.10 Compliance

Because of the small size of these devices, each of the labels shown are attached to the individual shipping container. They are illustrated here to comply with 21 CFR 1040.10 as applicable under the Radiation Control for Health and Safety Act of 1968.

